



# Luxury - Luxury+ 1 Posto / 1 Seater

**Salon Ambience**  
100% MADE IN ITALY

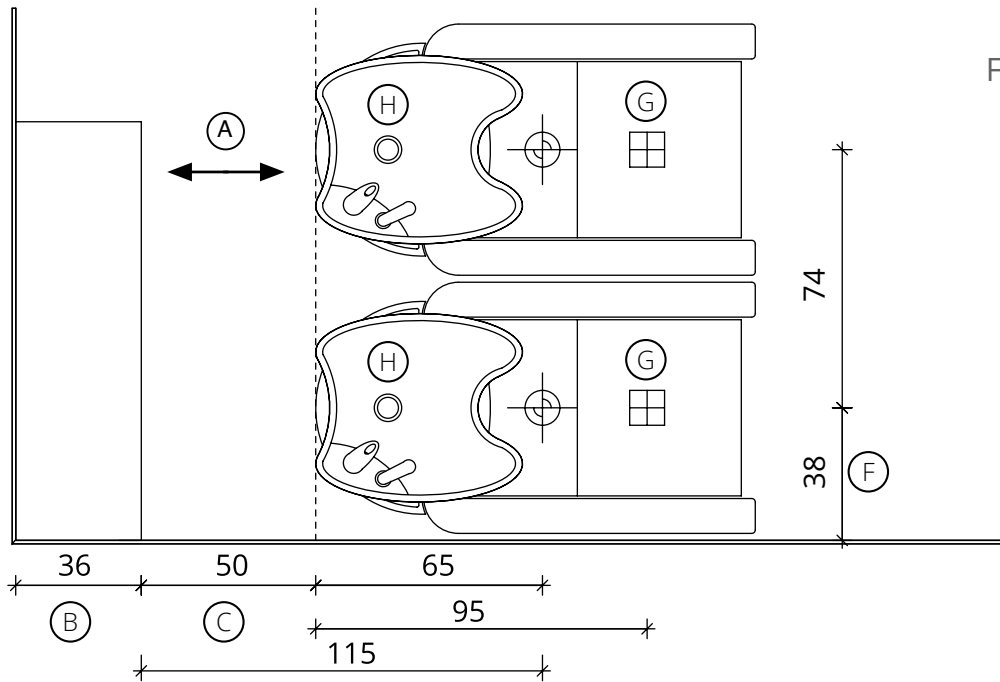

Fissaggio Pavimento  
Pavement Fixing

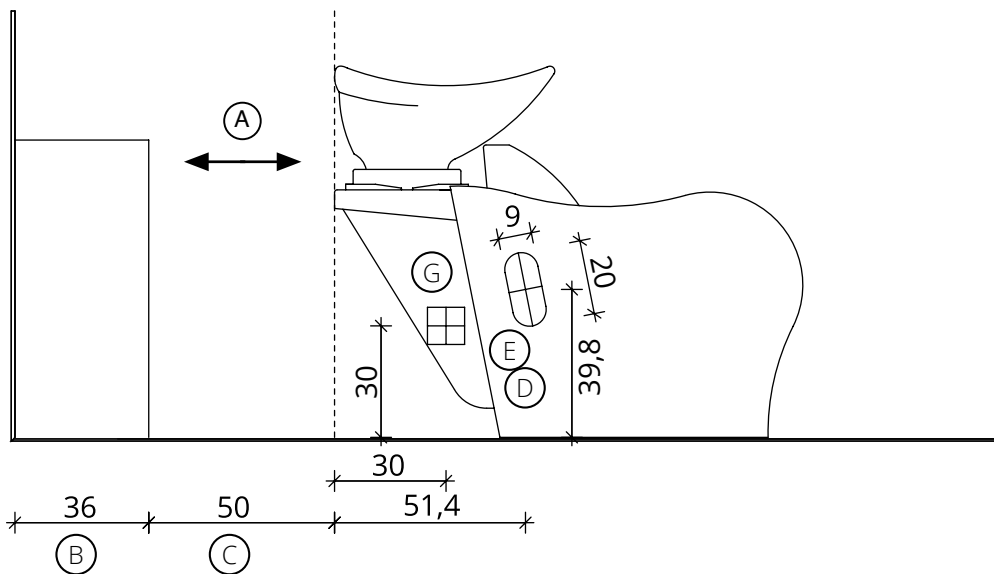

Fissaggio Muro  
Wall Fixing


- |  |  |  |
|--|--|--|
| (A) Spazio di lavoro<br>Work space   | (D) Entrata tubo acqua calda e fredda<br>Hot and cold water inlet tube | (G) Punto elettrico 220V<br>Electric point 220V                              |
| (B) 36 cm per il mobile 'Service Centre'<br>48 cm per il mobile 'Wall System'<br>36 cm for 'Service Centre' cabinet<br>48 cm for 'Wall System' cabinet | (E) Uscita tubo acqua<br>Water outlet tube                             | (H) Carico acqua C-F 3/8" - Scarico ø40<br>Water Inlet H-C 3/8" - Outlet ø40 |
| (C) Misura variabile (Non meno di 50 cm)<br>Variable measurement (No less than 50 cm)  | (F) Misura dal muro<br>Measurement from wall                           |  |



WU/015  
WU/016  
WU/018



WU/310  
WU/311  
WU/312

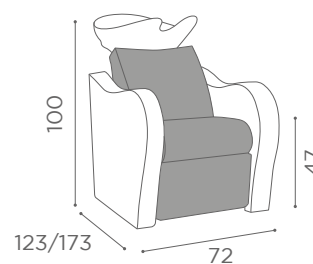


COLOURS A ● B ○




# Luxury - Luxury+ 2 Posto / 2 Seater

**Salon Ambience**  
100% MADE IN ITALY

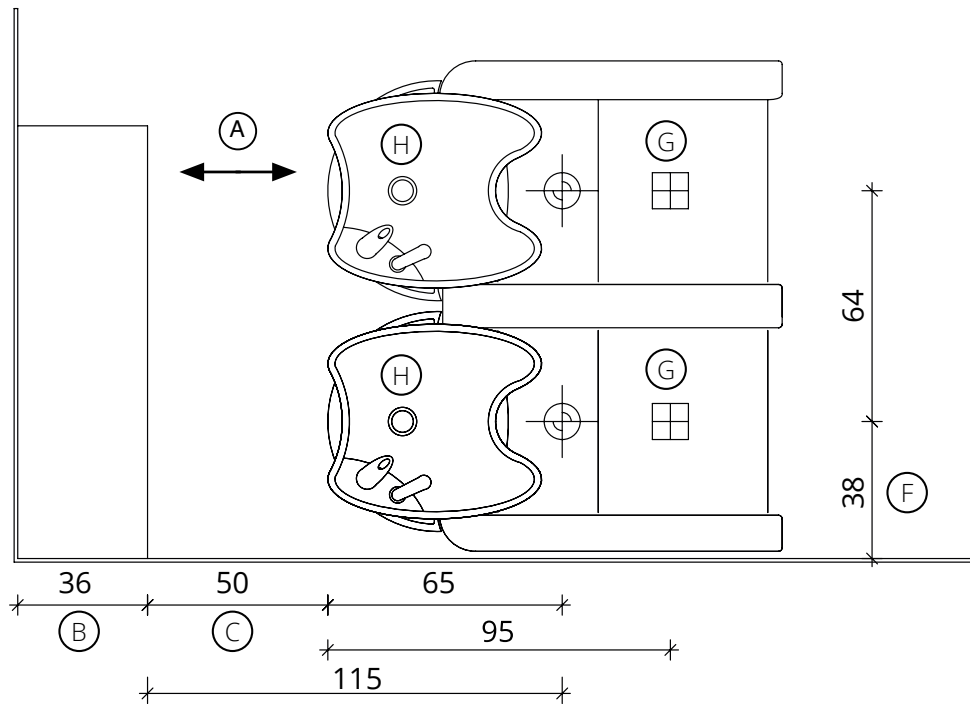

Fissaggio Pavimento  
Pavement Fixing

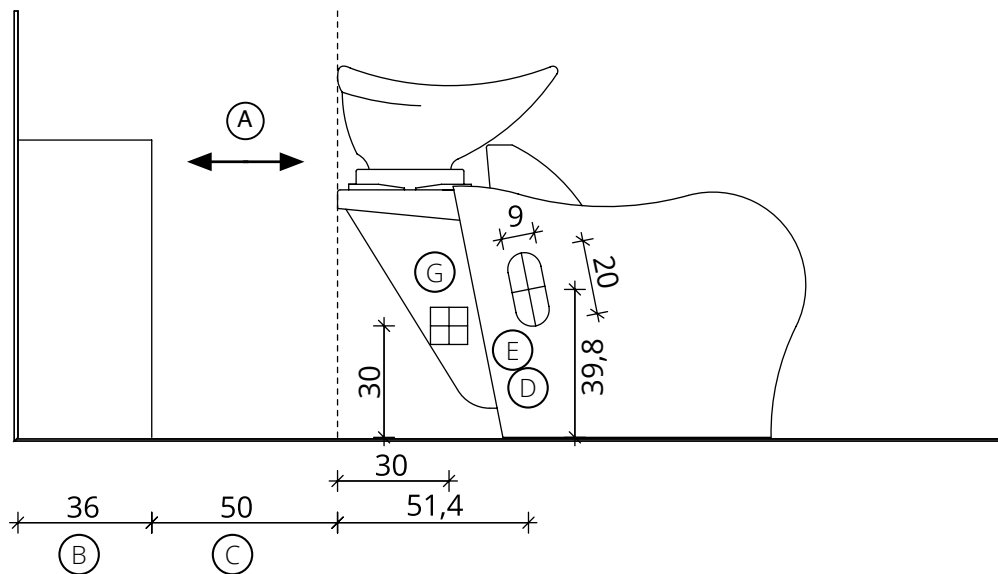


Fissaggio Muro  
Wall Fixing

- |  |  |  |
|--|--|--|
| (A) Spazio di lavoro<br>Work space   | (D) Entrata tubo acqua calda e fredda<br>Hot and cold water inlet tube | (G) Punto elettrico 220V<br>Electric point 220V                              |
| (B) 36 cm per il mobile 'Service Centre'<br>48 cm per il mobile 'Wall System'<br>36 cm for 'Service Centre' cabinet<br>48 cm for 'Wall System' cabinet | (E) Uscita tubo acqua<br>Water outlet tube                             | (H) Carico acqua C-F 3/8" - Scarico ø40<br>Water Inlet H-C 3/8" - Outlet ø40 |
| (C) Misura variabile (Non meno di 50 cm)<br>Variable measurement (No less than 50 cm)  | (F) Misura dal muro<br>Measurement from wall                           |  |



WU/120  
WU/121  
WU/128

WU/320  
WU/321  
WU/322

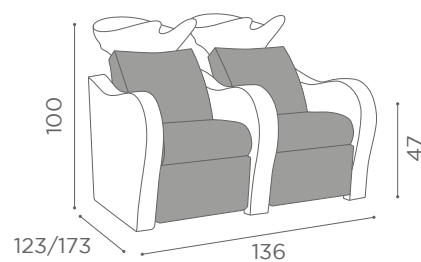


COLOURS A ● B ○




# Luxury - Luxury+ 3 Posti / 3 Seater

**Salon Ambience**  
100% MADE IN ITALY

Fissaggio Pavimento  
Pavement Fixing

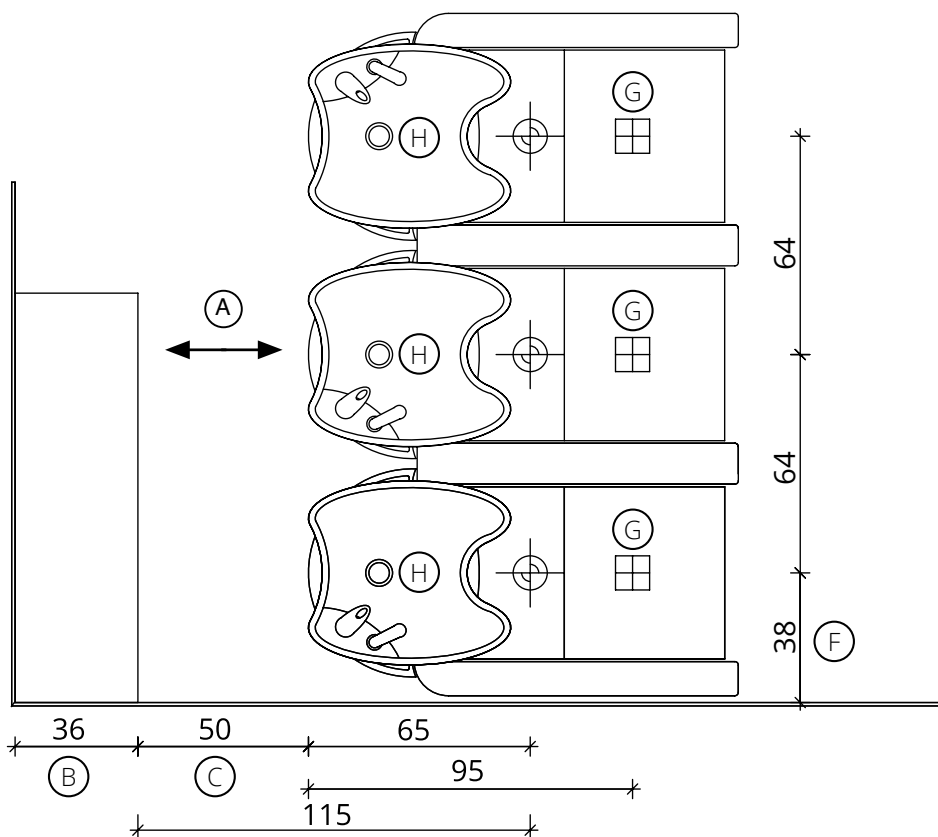

Fissaggio Muro  
Wall Fixing

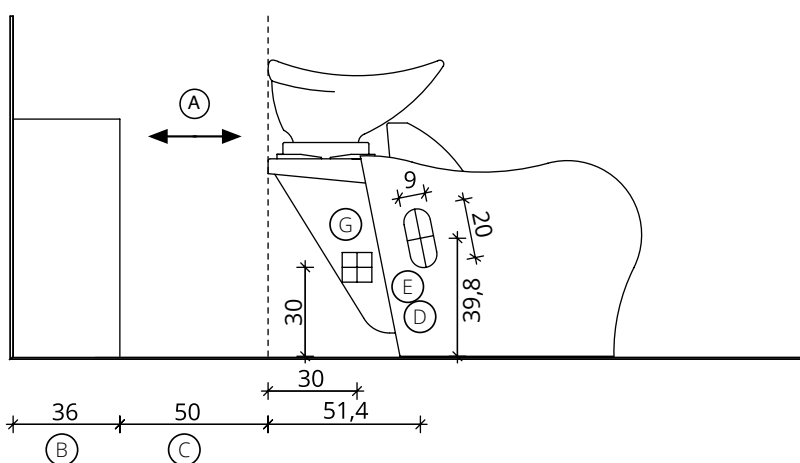


- (A) Spazio di lavoro  
Work space
- (B) 36 cm per il mobile 'Service Centre'  
48 cm per il mobile 'Wall System'  
36 cm for 'Service Centre' cabinet  
48 cm for 'Wall System' cabinet
- (C) Misura variabile (Non meno di 50 cm)  
Variable measurement (No less than 50 cm)
- (D) Entrata tubo acqua calda e fredda  
Hot and cold water inlet tube
- (E) Uscita tubo acqua  
Water outlet tube
- (F) Misura dal muro  
Measurement from wall
- (G) Punto elettrico 220V  
Electric point 220V
- (H) Carico acqua C-F 3/8" - Scarico ø40  
Water Inlet H-C 3/8" - Outlet ø40



WU/130  
WU/131  
WU/138



WU/330  
WU/331  
WU/332

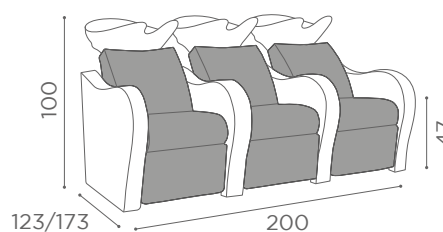

COLOURS A ● B ○

